


9 8 7 6 5 4 3 2 1

These drawings and specifications are the exclusive property of Martin International Enclosures, Inc. and shall not be copied, reproduced or used for any purpose at all without prior written permission of Martin International Enclosures, Inc. (MIE) except to manufacture for MIE, Inc. the items on the drawings. These drawings are issued in strict confidence.


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

F
E
D
C
B
A

F
E
D
C
B
A

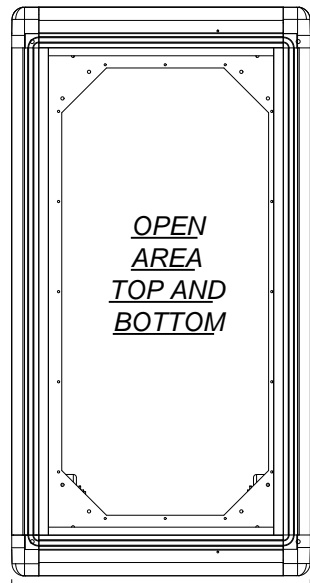


23.330
19.090
18.310
A

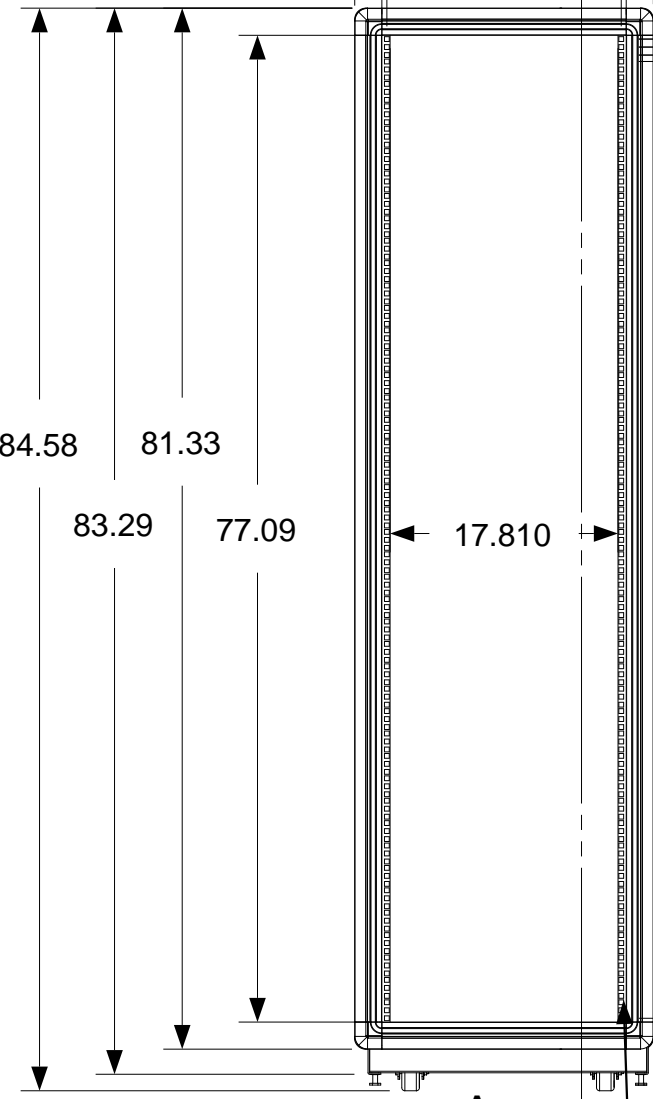


84.58 81.33
83.29 77.09

FRONT VIEW

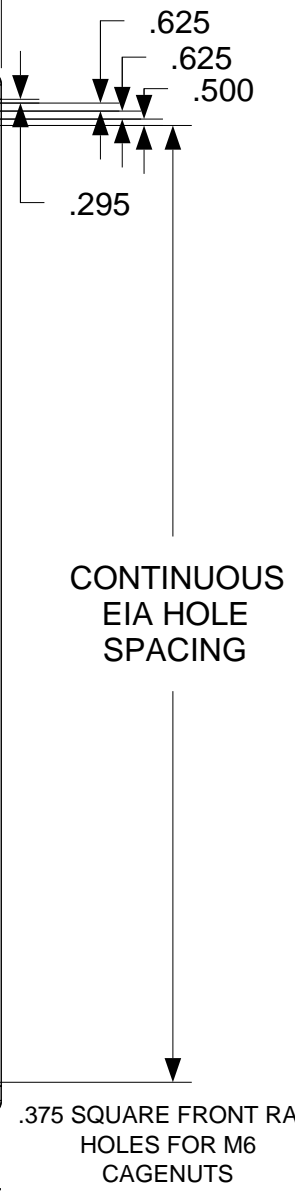

CONTINUOUS
EIA HOLE
SPACING

.375 SQUARE FRONT RAIL
HOLES FOR M6
CAGENUTS

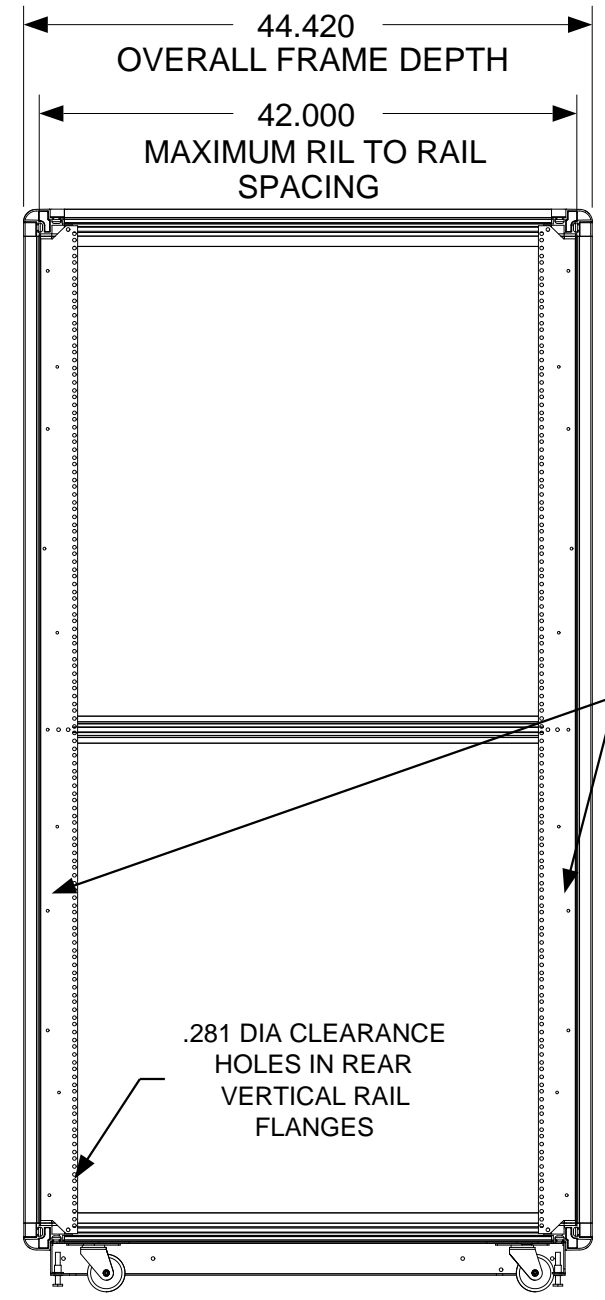



44.420
OVERALL FRAME DEPTH
42.000
MAXIMUM RIL TO RAIL
SPACING

FULLY ADJUSTABLE
VERTICAL MOUNTING
RAILS
(2 PAIR)

.281 DIA CLEARANCE
HOLES IN REAR
VERTICAL RAIL
FLANGES

SIDE SECTION VIEW

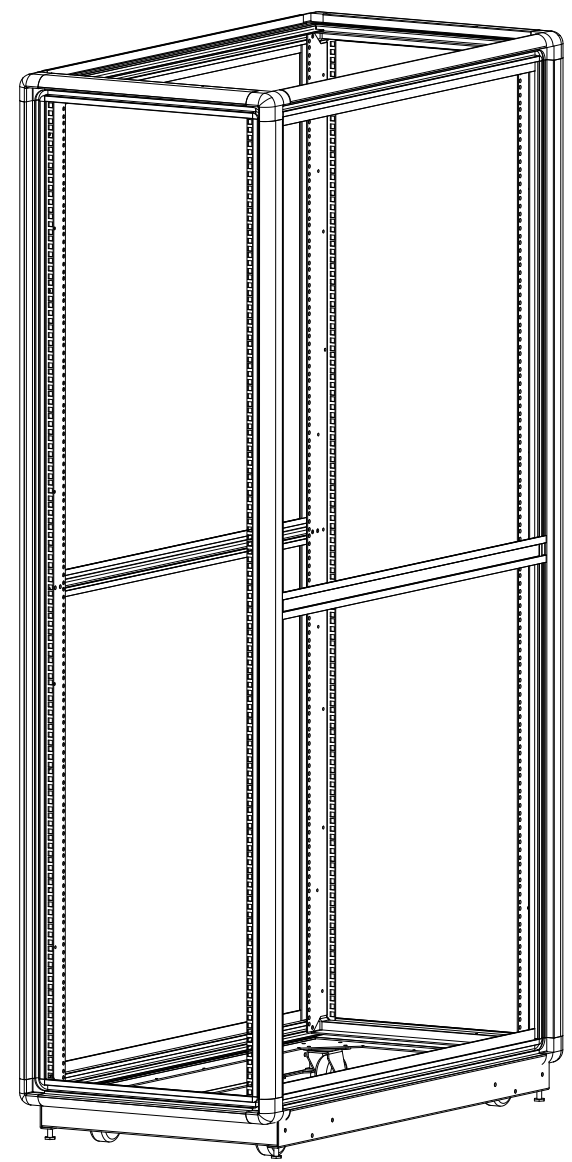

ITEM	PART NUMBER	DESCRIPTION	QTY
MATERIAL			44U X 42" DEEP; 19" RACKMOUNT EXTRUDED ALUMINUM FRAME
TOLERANCES EXCEPT AS NOTED DECIMAL .XX = +/- .020 .XXX = +/- .010 ANGULAR +/- 1/2 DEG			
DRAWN BY: SMM		PART NAME 44U X 42" DEEP; 19" RACKMOUNT EXTRUDED ALUMINUM FRAME	REV
APPROVED BY:		SIZE B DATE 1/6/14 PART # 771942-2L	FINISH: A/R SHEET 1 OF 1

9 8 7 6 5 4 3 2 1